




AS SERIES



ENCLOSURES

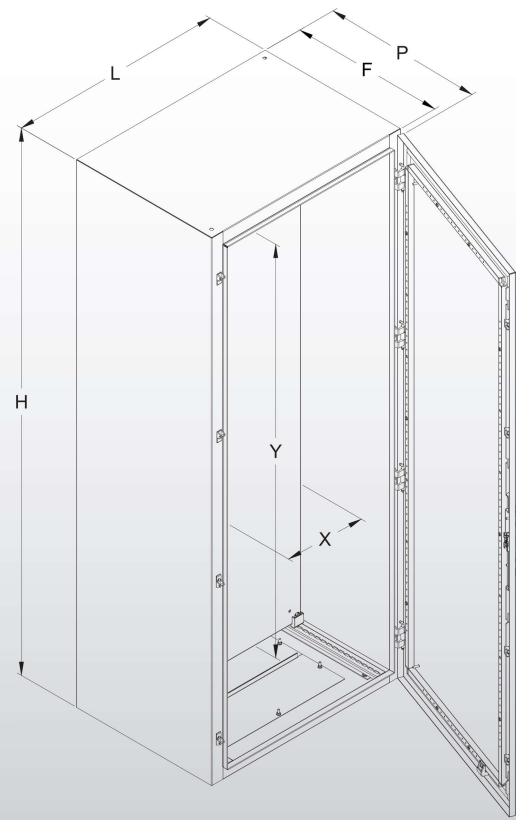

ASX SERIES ENCLOSURES

SERIES AS monoblock enclosures IP 55

Description: the AS series are monoblock enclosures with totally welded structure in steel sheet thickness 1.5 mm. The hinged doors are in 2. mm thick steel sheet. The mounting plates are in 2.5 mm thick galvanised steel. The frame has the cable entry and flanges on the bottom.

ASB enclosures with single door are supplied with:

- Monoblock frame completely welded with cable entry on the bottom
- **DBE...X** blind door opening 120°, espanolette closing system, 3mm double bar lock
- **PNA** mounting plate (page 16)

Elements to be ordered separately:

- Lifting eyebolts (page 57)
- Plinth **ZAK...X** + **FLK...X** H=100/200 mm (page 18)

Protection:

- IP55, IEC 62208 ; CEI EN 62262
- IK10, IEC 62208 ; CEI EN 62262
- Nema type 1-12: CSA22.2,941 e 942, UL508a


Technical features:

- external panel thickness 15/10
- door thickness 20/10
- mounting plate thickness 25/10

Certifications:

CODE	Nominal dimensions			Other dimensions	Inner plate	
	H	L	P	F	X	Y
ASB1264X	1200	600	400	373	490	1080
ASB1284X	1200	800	400	373	690	1080
ASB1462X	1400	600	250	173	490	1280
ASB1464X	1400	600	400	373	490	1280
ASB1484X	1400	800	400	373	690	1280
ASB1662X	1600	600	250	173	490	1480
ASB1664X	1600	600	400	373	490	1480
ASB1684X	1600	800	400	373	690	1480
ASB1686X	1600	800	600	573	690	1480
ASB1864X	1800	600	400	373	490	1680
ASB1884X	1800	800	400	373	690	1680
ASB1886X	1800	800	600	573	690	1680
ASB2084X	2000	800	400	373	690	1880
ASB2086X	2000	800	600	573	690	1880
ASB20A4X	2000	1000	400	373	890	1880
ASB20A6X	2000	1000	600	573	890	1880



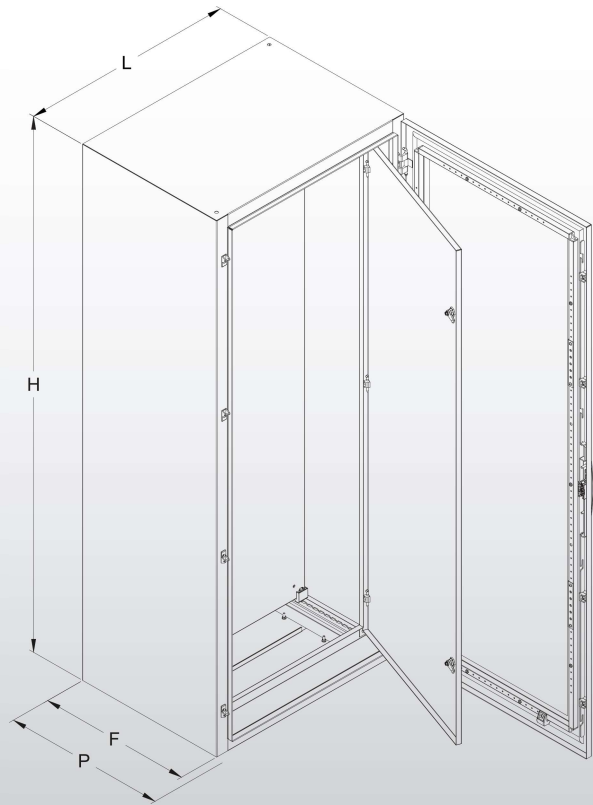

ASX SERIES ENCLOSURES

ASV – Monoblock enclosure with glazed door

AFV enclosures are supplied with:

- Monoblock frame with cable entry and flanges
- Glazed door **DTE...X** opening 120°, espanolette locking, 3 mm double bar
- Inner blind door **DBI...X**
- Mounting plate **PNA** in galvanised steel (page 16)

Elements to be ordered separately:

- Lifting eyebolts (page 57)
- Plinth **ZAK...X** + **FLK...X** H=100/200 mm (page 18)

CODE	Nominal dimensions			Other dimensions	Inner plate	
	H	L	P	F	X	Y
ASV1264X	1200	600	400	373	490	1080
ASV1284X	1200	800	400	373	690	1080
ASV1462X	1400	600	250	173	490	1280
ASV1464X	1400	600	400	373	490	1280
ASV1484X	1400	800	400	373	690	1280
ASV1662X	1600	600	250	173	490	1480
ASV1664X	1600	600	400	373	490	1480
ASV1684X	1600	800	400	373	690	1480
ASV1686X	1600	800	600	573	690	1480
ASV1864X	1800	600	400	373	490	1680
ASV1884X	1800	800	400	373	690	1680
ASV1886X	1800	800	600	573	690	1680
ASV2084X	2000	800	400	373	690	1880
ASV2086X	2000	800	600	573	690	1880
ASV20A4X	2000	1000	400	373	890	1880
ASV20A6X	2000	1000	600	573	890	1880